

Straight Blade Devices 50A, 125/250V, 3 Pole, 3 Wire Non-Grounding Connector Body

HUBBELL



Features

- Catalog number, ratings and certifications molded in face
- Gripping ribs provide secure gripping area
- Supertough nylon housing

Ordering Information

Description	Cord Diameter	UPC	Catalog Number
Connector body, Insulgrip, nylon.	.625"-1.218" (15.9-30.9)	783585015118	HBL7515C

Listings

UL Listed File E1706
CSA Certified

Specifications

Housing	Supertough Nylon
Blade Holder	Reinforced Thermoplastic Polyester
Blades	Brass
Box Terminals	Copper Alloy
Cord Clamps	Reinforced Thermoplastic Polyester

Performance

Electrical



Current Interrupting Certified for current interrupting at full rated current
Dielectric Voltage Withstands 2,000V minimum

Mechanical

Product Identification Ratings are a permanent part of the device
Terminal Accommodation #12 AWG through #4 AWG copper wire only
Terminal Identification Terminals identified in accordance with UL 498 and CSA

Environmental

Flammability UL 94 HB
IP Suitability IP20
Operating Temperatures Maximum continuous 75°C; minimum -40°C (w/o impact)

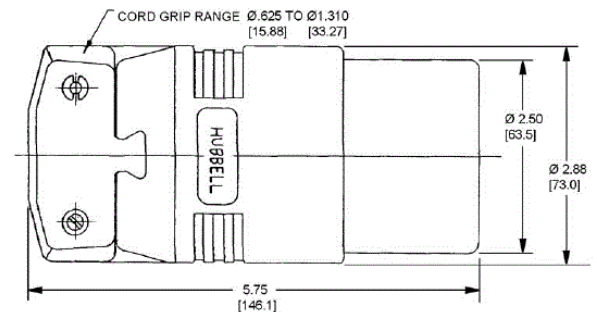

Resources

Customer Use Drawing
eCatalog

Dimensions in Inches (mm)

Hubbell Wiring Device-Kellems • Hubbell Incorporated (Delaware) • 40 Waterview Drive • Shelton, CT 06484

Phone (800) 288-6000 • Fax (800) 255-1031 • Specifications subject to change without notice.

