

Splice Insulators and Insulating Covers

T&B Catalog Number:

MSC500

UPC Number:

78621081774

Status:

Active

Description:

Motor Stub Splice Insulator 3/0 - 300 MCM

Features

Re-enterable motor stub insulator.

Easy installation. No special tools required.

Application

Insulate motor stub splices quickly and dependably.

General

Style	Motor Stub Splice Insulator
Material	Body - Modified Neoprene Elastomer, Straps - Nylon
Color	Black
Temperature Range	90°C

Dimension Information

A (inches)	8.875
B (inches)	2.562
C (inches)	2.482
Cable Range	350 - 500 MCM
Standard Length (inches)	1.75

Specifications

Voltage Rating	600V
Flammability Rating	UL 94 V-1

Packaging

T&B Order Multiple	5
Package in Units	5
T&B Sold in UOM	Each
T&B Weight Per UOM	59.56 lbs. per 100

Application Support

Specifications	Available on Website
Overview	Available on Website

Notes

Order multiple is standard package.

Certifications


RoHS Compliance	Yes
-----------------	-----

Certifications



File Nbr:
E9809

For further technical assistance, please contact us...

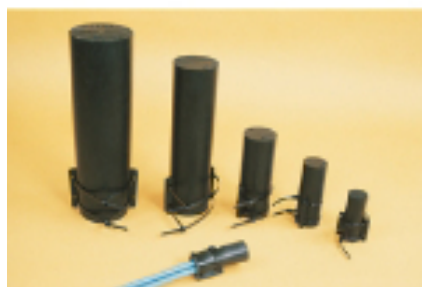

Memphis, TN 38125
www.tnb.com

8155 T&B Blvd.
Memphis, TN 38125

Phone: (888) 862-3289
Fax: (901) 252-1321
Email: techsupport@tnb.com