


### TYPE KPA

#### SCRULUG™

For Copper Cable

High copper alloy tin-plated terminal for joining a wide range of cable to equipment pads or terminal blocks. Especially good in light industrial applications. The tongue and body are a one-piece design. The pressure bar equalizes pressure over the conductor and prevents the screw from cutting into the cable.

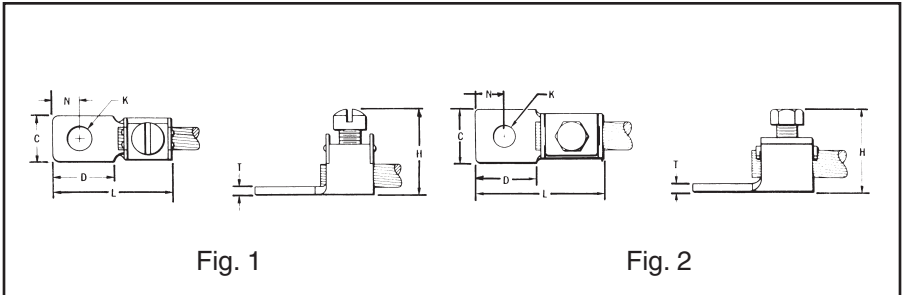

A-11

CATALOG NUMBER	WIRE RANGE	FIG. NO.	C	D	H	K	STUD HOLE SIZE	L	N	T	RECOMMENDED TIGHTENING TORQUE in-lb
<b>KPA8C</b>	8 STR. - 14 SOL.	1	.38	.47	.72	.21	.10	.95	.22	.06	12
<b>KPA4C</b>	14 SOL. - 4 STR.	1	.50	.59	.94	.27	1/4	1.20	.30	.06	45
<b>KPA25</b>	4 STR. - 1/0 STR.	2	.75	.81	1.25	.33	5/16	1.70	.41	.10	180
<b>KPA28</b>	1/0 STR. - 4/0 STR.	2	.97	1.12	1.66	.40	3/8	2.29	.53	.13	250
<b>KPA34</b>	4/0 STR. - 500 kcmil	2	1.38	1.38	2.44	.54	1/2	3.14	.75	.20	375

NOTE: For unplated version add "UNPL" suffix.