

## Class J Fuse Blocks

### JP Series

#### Specifications

Description: Pyramid style 3-pole fuse block for use with Class J fuses (Cooper Bussmann® LPJ, DFJ, JKS).

Dimensions: See Dimensions illustrations.

#### Ratings:

Volts: — 600Vac/dc

Amps: — 0-30A

SCCR: — 200kA RMS Sym.

Agency Information: CE, UL Listed, UL 4248, Guide IZLT, File E14853, CSA Certified, C22.2 No. 39, Class 4225-04, File 47235.

Flammability Rating: UL 94V0.

Mounting: Panel or 35mm DIN rail mount.



To order DIN rail: Part# NDNA 100 (1 meter) or NDNA 200 (2 meter).

#### Catalog Numbers

| Catalog Numbers | Panel | Mounting               |                            | Aluminum | Box Copper Only | Wire Range     |
|-----------------|-------|------------------------|----------------------------|----------|-----------------|----------------|
|                 |       | With DIN Rail Adapter* | Screws with Pressure Plate |          |                 |                |
| JP60030-3PR     | X     |                        | X                          |          |                 | #10-14 Cu Only |
| JP60030-3CR     | X     |                        |                            | X        |                 | #2-14 Cu/Al    |
| JP60030-3COR    | X     |                        |                            |          | X               | #2-14 Cu Only  |
| JP60030-3PRA    |       | X                      | X                          |          |                 | #10-14 Cu Only |
| JP60030-3CRA    |       | X                      |                            | X        |                 | #2-14 Cu/Al    |
| JP60030-CORA    |       | X                      |                            |          | X               | #2-14 Cu Only  |

\*Adapter only for DIN rail - Cat No. JPA-3.

Dimensions - in (mm) ± 0.015" (± 0.40mm)

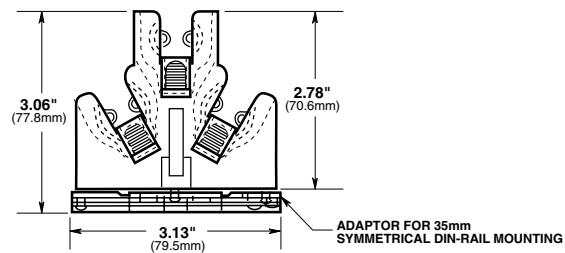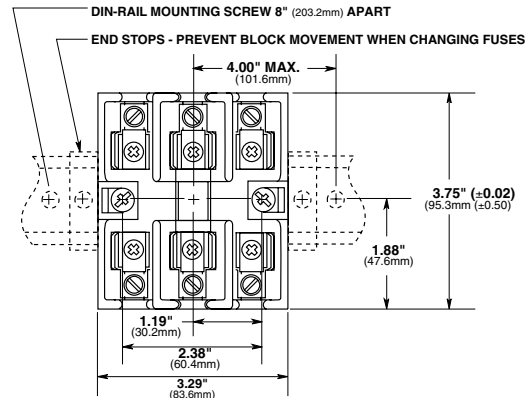

Data Sheet:1108

### JA60030 Add-a-pole

#### Specifications

Description: Adder fuse block to achieve number of poles desired, for use with Class J fuses (Cooper Bussmann LPJ, DFJ & JKS).

Dimensions: See Dimensions illustrations.

#### Ratings:

Volts: — 600Vac/dc

Amps: — 0-30A

SCCR: — 200kA RMS Sym.

Agency Information: UL Listed, UL 4248, Guide IZLT, File E14853, CSA Certified, C22.2 No. 4248, Class 6225-01, File 47235.


Flammability Rating: UL 94V0.

Mounting: Panel or 35mm DIN rail mount.

Features: Panel and DIN rail mount, adder block, retaining clip



Dimensions - in (mm)

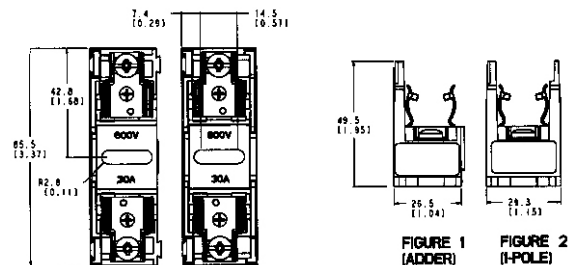

| Amps   | Poles | Screw      | Screw w/Retaining Clip | Pressure Plate | Pressure Plate w/Retaining Clip | Box Lug    | Box Lug w/Retaining Clip | Wire Range (Cu Only)                           |
|--------|-------|------------|------------------------|----------------|---------------------------------|------------|--------------------------|--|
| ½ - 30 | ADDER | JA60030-AS | JA60030-ASR            | JA60030-AP     | JA60030-APR                     | JA60030-AC | JA60030-ACR              | S, SR, P, PR 10 - 18 AWG<br>C, CR, 10 - 14 AWG |
|        | 1     | JA60030-1S | JA60030-1SR            | JA60030-1P     | JA60030-1PR                     | JA60030-1C | JA60030-1CR              |  |
|        | 2     | JA60030-2S | JA60030-2SR            | JA60030-2P     | JA60030-2PR                     | JA60030-2C | JA60030-2CR              |  |
|        | 3     | JA60030-3S | JA60030-3SR            | JA60030-3P     | JA60030-3PR                     | JA60030-3C | JA60030-3CR              |  |