

NEER Zinc LMM Straight Liquidtight Connectors

For Liquidtight Flexible Metal Conduit and Type B Nonmetallic Conduit.

Suitable for use in Class I, Division 2

Applications

- Terminate and seal liquidtight flexible metal conduit to either oiltight, liquidtight, or raintight box or enclosure.
- Connectors can be used with tapered thread female entry or unthreaded knockout.

Features

- Furnished with locknut and sealing ring.
- Liquidtight/raintight/oiltight.
- Suitable for grounding 3/8" thru 1-1/4".
- Suitable for wet locations.

Standard Material

- Zinc diecast

Certifications and Compliances

- UL Standard: 514B
- UL Listed: E32539
- CSA Standard: C22.2 No. 18.3
- CSA Certified: 208044
 - LMM-01 through LMM-61 and LMM-02 through LMM-62
- CSA Certified: LR14489
 - LMM-71 through LMM-91 and LMM-72 through LMM-92
- CSA Certified: LR39354
- NEMA: FB-1



LMM-01

Trade Size (Inches)	Catalog Number	Insulated Throat Catalog Number	Dimensions in Inches/Millimeters		
			Body Length	Thread Length	Diameter
3/8 (1/2 knockout)	LMM-01	LMM-02	1.49/37.8	0.53/13.5	1.28/32.5
1/2	LMM-11	LMM-12	1.49/37.8	0.53/13.5	1.28/32.5
3/4	LMM-21	LMM-22	1.53/38.9	0.53/13.5	1.56/39.6
1	LMM-31	LMM-32	1.95/49.5	0.66/16.8	1.81/46.0
1-1/4	LMM-41	LMM-42	2.06/52.3	0.67/17.0	2.25/57.2
1-1/2	LMM-51	LMM-52	2.06/52.3	0.67/17.0	2.50/63.5
2	LMM-61	LMM-62	2.04/51.8	0.67/17.0	3.00/76.2
2-1/2	LMM-71	LMM-72	3.54/89.9	1.02/25.9	3.68/93.5
3	LMM-81	LMM-82	4.05/102.9	1.07/27.2	4.38/111.3
3-1/2	LMM-85	LMM-86	4.44/112.8	1.09/27.7	4.98/126.5
4	LMM-91	LMM-92	4.99/126.7	1.15/29.2	5.54/140.7

NEER Zinc LML 90° Liquidtight Connectors

For Liquidtight Flexible Metal Conduit and Type B Nonmetallic Conduit.

Suitable for use in Class I, Division 2

Applications

- Terminate and seal liquidtight flexible metal conduit, at 90° angle, to either oiltight, liquidtight, or raintight box or enclosure.
- Connectors can be used with tapered thread female entry or unthreaded knockout.

Features


- Furnished with locknut and sealing ring.
- Liquidtight/raintight/oiltight.
- Suitable for grounding 3/8" thru 1-1/4".
- Suitable for wet locations.

Standard Material

- Zinc diecast

Certifications and Compliances

- UL Standard: 514B
- UL Listed: E32539
- CSA Standard: C22.2 No. 18.3
- CSA Certified: 208044
- NEMA: FB-1

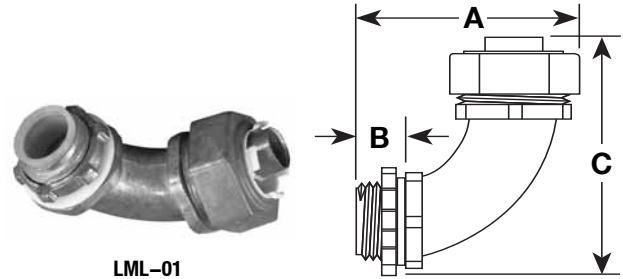

LML-01

Commercial Products

COMMERCIAL PRODUCTS: LIQUIDTIGHT CONDUIT FITTINGS

Trade Size (Inches)	Catalog Number	Insulated Throat Catalog Number	Dimensions in Inches/Millimeters		
			A	B	C
3/8 (1/2 knockout)	LML-01	LML-02	2.15/54.6	0.53/13.5	2.40/61.0
1/2	LML-11	LML-12	2.15/54.6	0.53/13.5	2.45/62.2
3/4	LML-21	LML-22	2.42/61.5	0.53/13.5	2.64/67.1
1	LML-31	LML-32	2.90/73.7	0.66/16.8	3.34/84.8
1-1/4	LML-41	LML-42	3.40/86.4	0.67/17.0	3.76/95.5
1-1/2	LML-51	LML-52	3.40/86.4	0.67/17.0	4.22/107.2
2	LML-61	LML-62	4.30/109.2	0.67/17.0	4.78/121.4
2-1/2	LML-71	LML-72	5.75/146.1	1.03/26.2	7.00/177.8
3	LML-81	LML-82	6.00/152.4	0.99/25.1	7.25/184.2
3-1/2	LML-85	LML-86	7.88/200.2	1.18/30.0	9.00/228.6
4	LML-91	LML-92	8.75/222.3	1.17/29.7	10.00/254.0