

# UTILCO Copper Compression C-Tap Connectors




## TYPE ULT

### Features

- Manufactured from high strength copper alloy
- Clearly marked with wire size and die index
- Range taking
- UL Listed for 600 volts, 90° C

### Benefits

- Provides maximum conductivity and eliminates the possibility of corrosion
- Provides easy identification and tooling recommendation
- Reduces inventory
- Ensures reliability

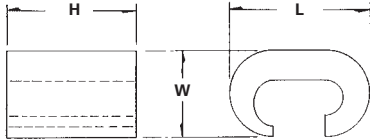

Catalog Number	Copper Wire Range		Die Index	Dimensions		
	Main	Tap		L	W	H
ULT-4-Z	4str-6sol	6str-6sol	BG or 5/8	3/4	15/32	49/64
ULT-5-Z	4str-6sol	4str-4sol	BG or 5/8	3/4	15/32	27/32
ULT-6-Z	2str-2sol	6str-8sol	C	7/8	5/8	1
ULT-7-Z	2str-2sol	2str-2sol	C	7/8	39/64	1-1/16
ULT-12-Z	4/0str-3/0str	4/0str-3/0str	F or D3	1-1/8	1	1-5/8

Tested to UL 486A-486B, UL File E6207

H