


Duplex - Whipper-Snap Connector - Zinc

Images

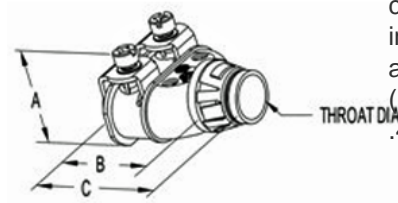

Application

Whipper-Snap® AC/MC/MCI-A and FMC Duplex connector, allows for the connection of two AC/MC cables into one 1/2" knockout. It is also suitable for use with steel and aluminum 3/8" trade size Flexible Metallic Conduit (FMC). Recommended cable types: 14/2 - 10/3 diameter: .42 - .61

Product Information

[Download Photo Image](#) [Download Dimensional Image](#)
Dimension A in Inches: 1.38
Dimension B in Inches: 1.25
Dimension C in Inches: 1.81

Material: Zinc Die Cast Body with Steel Saddle
Clamps and Insulated Throat
Finish: Ball Burnish

Certifications & Codes:

Federal Specification Number: A-A-50552
NEMA Standard: FB-1
UL File Number: E20534
UL Standard: UL514B
UNSPSC: 39121438

Catalog ID: SG3838ASP

UPC Number: 78174708691

Description: Bridgeport Fittings SG3838ASP is a quick install fitting that simply snaps into any 1/2" knockout. The SG3838ASP has two saddle clamps which allow this fitting to accommodate two different size cables and 3/8" FMC. Removal is accomplished by bending in one of the two locking tabs. Insulated Throat. Reusable. Patented

Application: Whipper-Snap® AC/MC/MCI-A and FMC Duplex connector, allows for the connection of two AC/MC cables into one 1/2" knockout. It is also suitable for use with steel and aluminum 3/8" trade size Flexible Metallic Conduit (FMC). Recommended cable types: 14/2 - 10/3 diameter: .42 - .61

Trade Size: 1/2"

Std Pkg Qty: 200

Unit Qty: 20